


# 止回阀

耐磨排渣止回阀

## 主要性能规范

型号	公称压力 PN (MPa)	试验压力 (Mpa)		工作 温度 (°C)	工作 压力 (MPa)	适用 介质
		壳体	密封			
PH44H-10C	1.0	1.5	1.1	≤200	1.0	灰渣 混合物
PH44H-16C	1.6	2.4	1.76		1.6	
PH44H-25	2.5	3.8	2.8		2.5	

## 结构图

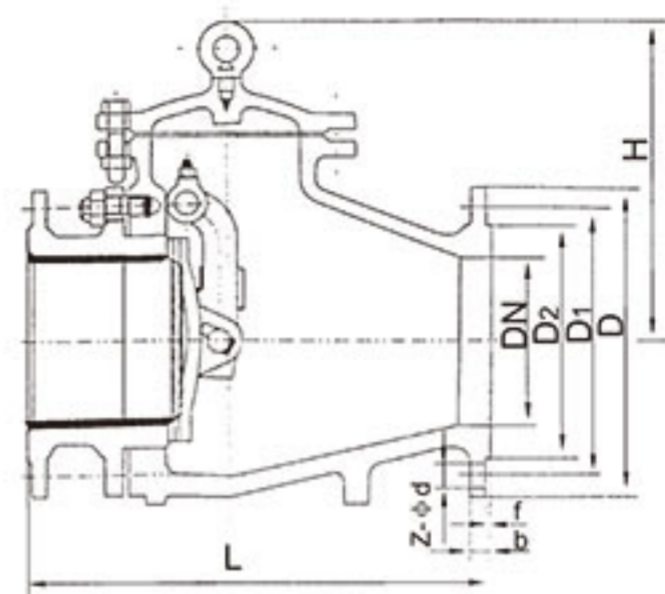

## 主要外形尺寸及连接尺寸

型号	公称通径 DN(mm)	主要尺寸(mm)							
		L	D	D <sub>1</sub>	D <sub>2</sub>	Z-φd	b	f	H
PH44H-10C	80	241	200	160	132	8-φ18	20	3	260
	100	292	220	180	156	8-φ18	20	3	270
	150	356	285	240	212	8-φ22	22		290
	200	495	340	295	268	8-φ22	22		345
	250	622	395	350	320	12-φ22	24		412
	300	698	445	400	370	12-φ22	26		468
	350	787	505	460	430	16-φ22	28	4	524
	400	900	565	515	482	16-φ26	30		600
	450	918	615	565	532	20-φ26	32		670
	500	978	670	620	585	20-φ26	34		750
PH44H-16C	80	241	200	160	132	8-φ18	20	3	260
	100	292	220	180	156	8-φ18	20		270
	150	356	285	240	212	8-φ22	24		290
	200	495	340	295	268	12-φ22	24		345
	250	622	405	355	320	12-φ26	26		412
	300	698	460	410	370	12-φ26	28	4	468
	350	787	520	470	429	16-φ26	30		524
	400	900	580	525	480	16-φ30	32		600
	450	918	640	585	548	20-φ30	34		670
	500	978	715	650	609	20-φ30	36		750
PH44H-25	80	318	200	160	132	8-φ18	24	3	260
	100	356	235	190	156	8-φ22	24		270
	150	444	300	250	212	8-φ26	28		290
	200	535	360	310	278	12-φ26	30	4	345
	250	622	425	370	335	12-φ30	32		412
	300	711	485	430	390	16-φ30	34		648
	350	838	555	490	450	16-φ33	38		524
	400	864	620	550	505	16-φ36	40		600
	450	978	670	600	555	20-φ36	42		670
	500	1016	730	660	615	20-φ36	44		750